

BANG & OLUFSEN

BEOCORD 4500

Beocord 4500 setting up guide

Contents

3 Placement


4 Connections

See the Beosystem 4500 user's guide for detailed operating instructions.

Placement

The Beocord 4500 must be placed so that ventilation is not impeded. Avoid placing it in direct sunlight, near radiators or other sources of heat.

Leave a space of at least 15 cm above the tape recorder to allow the lid to open freely.



The plastic feet supplied with the Beocord 4500 (and also with the Beomaster 4500 and the Beogram CD 4500) enable you to place the products in a slightly tilted position on a stable surface. Insert the feet in the holes provided on the base.





Alternatively, the Beocord 4500 (and also the Beomaster 4500 and the Beogram CD 4500) can be hung on a wall. The WB 4500 wall bracket, type no. 2030, is specially designed for this purpose. One wall bracket is required for each of these products.

Connections

Once connected to the Beomaster 4500 and to the mains, the Beocord 4500 is in stand-by mode and ready to be operated. The tape recorder is designed to be left in stand-by mode when not in use.

Beomaster 4500

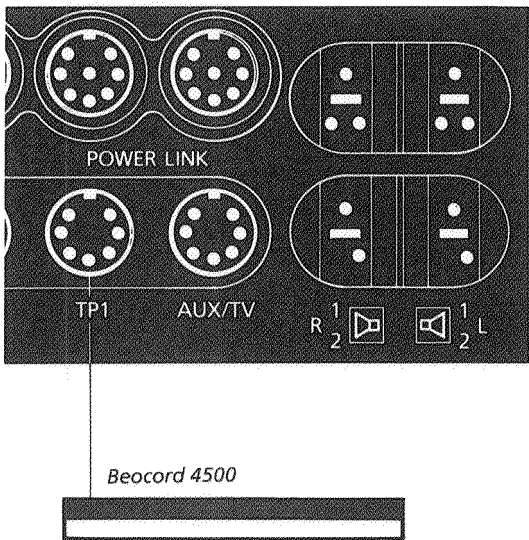

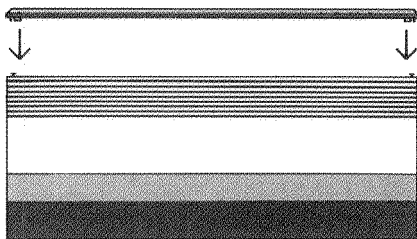

The metal bar supplied with the Beocord 4500 is for concealing cables. When you have made the necessary connections, insert the bar in the holes provided on the rear panel and press downwards.

International guarantee

This Bang & Olufsen product carries a guarantee against defects in workmanship and materials. The terms of the guarantee apply to the country of purchase but will be met by authorized Bang & Olufsen dealers in other countries. The guarantee period applying to the country of purchase takes priority over guarantee periods applying in other countries, even where differences exist.

In order to obtain service under this guarantee, a certificate stating the following information is required:

- Name of product and type number
- Serial number
- Date of purchase
- Guarantee period
- Dealer's or supplier's signature

This Beocord fulfils the conditions stated in the EEC directive 82/499 concerning radio frequency interference.

Special note for the UK market

IMPORTANT

The wires in the mains lead supplied with this apparatus are coloured in accordance with the following code:

Blue: Neutral

Brown: Live

As the colours of the wires in the mains lead may not correspond with the coloured markings identifying the terminals in your unit, proceed as follows:

The wire which is coloured blue must be connected to the terminal which is marked with the letter N or coloured black.

The wire which is coloured brown must be connected to the terminal which is marked with the letter L or coloured red.

Ensure that your equipment is connected correctly. If you are in any doubt, consult a qualified electrician.

