

Bang & Olufsen

M A S T E R P A N E L A V 9 0 0 0

This manual was scanned by
and available FREE at www.lconic-AV.co.uk

- 4 Beosystem AV 9000
- 5 Placement
- 6 Connections
- 7 Assembling
- 8 Ready for use...
- 9 Maintenance
- 10 International Guarantee

This setting-up guide explains how to assemble the Master Panel AV 9000 and make it ready for use. We recommend that you follow the instructions carefully.

For instructions on setting up the other components in your Beosystem AV 9000, please refer to the setting-up guides enclosed with these products.


See the Master Panel AV 9000 user's guide for detailed operating instructions.

**This manual was scanned by
and available FREE at www.lconic-AV.co.uk**

Do not connect the Master Panel AV 9000 to the mains until you have finished the setting-up procedure and connected all the cables.

The following parts are required to set up the Master Panel AV 9000 and to connect it to your Beocenter AV 9000:



- one set of glass doors (left and right)
- one cable cover, to conceal and hold the cables on the rear of the Master Panel AV 9000
- one Master Link cable for connection to the Beocenter AV 9000
- one lead for connection to the mains




Before you start...

When setting up the Master Panel AV 9000 we suggest you use the following sequence:

- 1 Place the Master Panel AV 9000 where you want to use it.
- 2 Connect all cables to their sockets on the rear panel of the Master Panel AV 9000 (only remember not to connect it to the mains yet!).
- 3 Arrange the cables in the grooves of the cable cover and attach the cover to the rear of the Master Panel AV 9000.
- 4 Loosen the transport protection screw for the CD drive mechanism.
- 5 Attach the glass doors.
- 6 Set up the other parts of your Beosystem AV 9000.
- 7 Connect all the products to the mains.



Complete the setting-up procedure as described in the *Setting-up guide* for the Beocenter AV 9000 (calibration of speakers etc.)

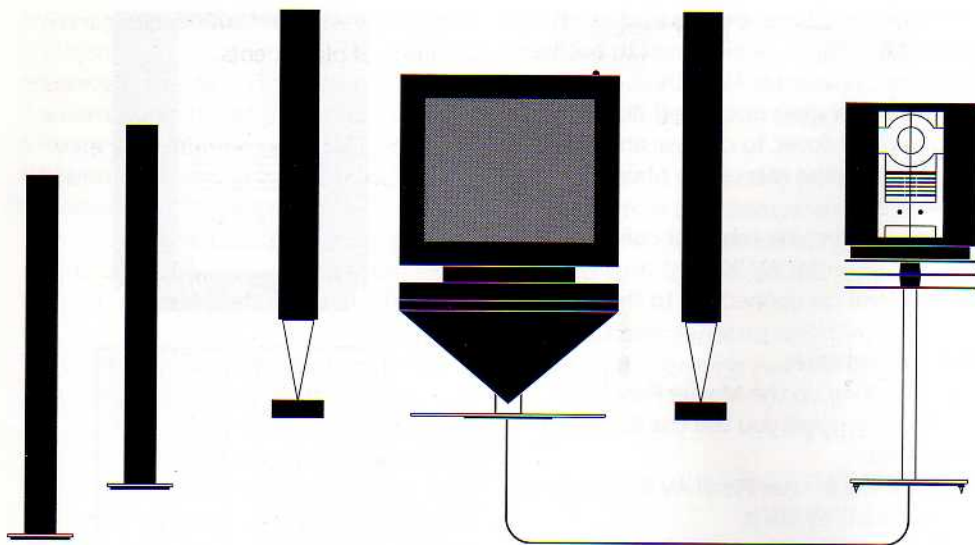

A Beosystem AV 9000 setup can be composed in different ways to your personal taste and home environment.

This setup is based on the Beocenter AV 9000 and the Master Panel AV 9000. It has a pair of Beolab 8000 as front speakers and a pair of Beolab 6000 as rear speakers.

Daily operations are carried out from the Master Panel AV 9000 by direct operation and through on-screen menus.

The Beolink 5000 remote control gives access to secondary functions not otherwise available and we therefore recommend it as an indispensable part of the system.

The setup is shown with both front and rear speakers connected. However, if you wish so, you can set up the system with only a set of front speakers connected.

**This manual was scanned by
and available FREE at www.lconic-AV.co.uk**

